

GE Advanced Materials  
Specialty Film & Sheet

# Colors and design will come to life

Lexan\* film and sheet for the graphics industry



GE imagination at work



# GE Advanced Materials Specialty Film and Sheet

GE Advanced Materials Specialty Film and Sheet provides value-added solutions across a wide variety of industries, ranging from graphics and electronics to building and construction. These solutions are founded on a portfolio of high quality materials backed by advanced technical support around the world.

As a business unit of the General Electric Company, GE Advanced Materials benefits from global cross-business resources and expertise. The Polymer Processing Development Center in the USA and its technical centers in the Netherlands, Japan, China and India help keep customers at the leading edge of film and processing technology. Hands-on engineering support for customers covers most aspects of application development: from design reviews, prototyping and testing, to thermoforming, injection molding and Insert Mold Decoration (IMD).

## Lexan® Polycarbonate Graphic Film and Sheet

### Clear Added-Value Performance

For the graphics industry, a range of tailor-made Lexan polycarbonate graphic film and sheet products helps deliver top quality performance and unlimited versatility. These materials are characterized by outstanding optical clarity and mechanical strength, consistent printability and ease of processing. Top quality is available in a wide choice of standard and high performance grades and a variety of surface finishes and textures. From anti-fog goggles to skid-resistant floor graphics, from crystal clear LED displays to large-scale in-mold decorated parts, end products are durable, eye-catching and cost-effective.



### Printability

Lexan polycarbonate films may be an excellent candidate for screen or offset printing and they offer unlimited possibilities to achieve a variety of graphic effects and intricate designs. They can be first- (front) surface printed and, due to their excellent clarity across all gauges, they may be suitable for second-surface printing. They offer excellent ink adhesion without pre-treatment and consistently enhance colors, with no loss of depth or vividness in second-surface printing. The films are compatible with a broad range of inks including conventional solvent-based inks, many UV-curing inks, water-based inks and infrared curing inks.

### Optical Clarity

Across all gauges, high light transmission and low haze values make Lexan film one of the highest clarity films available. Most Lexan films transmit 90% of visible light, which is a key reason why these materials are commonly used for LED/LCD windows.

### Thermal Stability

The high heat resistance and dimensional stability of Lexan film allows close-tolerance registration after repeated heating and drying cycles, as well as close proximity to illumination sources and other heat-emitting components. The film permits end-use performance to 133°C (270°F), with a continuous use temperature of 85°C (185°F).

### Formability

Lexan film's high melt strength facilitates thermoforming using a wide range of techniques. These include vacuum forming, pressure forming, embossing, matched metal forming, hydroforming, drape forming, thermal forming and pressure assist forming. Lexan film also offers the capability to produce deep-drawn, three-dimensional parts.

### Design Freedom

The Lexan film portfolio provides broad design versatility through its wide range of product options. These fall into four broad categories: polished films, textured films, flame retardant films and high performance films.

# POLISHED GRADES

Lexan polished films and sheet offer 86% to 92% light transmission across all gauges. Their outstanding clarity may make them well suited for LED/LCD display windows and for applications where second-surface printing is desirable, such as fascia panels for household appliances, audio/video equipment and automotive dials. These films are available in custom colors, subject to a minimum order quantity. In addition, various maskings are available to meet customer requirements.

The addition of polished optical grades to the Lexan film portfolio provides superior film cleanliness and/or low

stress for demanding optical applications. Extruded in a Class 10.000 clean room, these materials are manufactured from Lexan optical quality resin, which is renowned for its consistent high purity and processability.

Lexan films with both surfaces polished can be embossed or selectively textured by screen printing for aesthetic purposes. Screen printing can also provide a mar-resistant finish. Standard grades are available specifically for use with conventional solvent-based inks as well as UV-curing inks.

## Polished Graphic Grades (Gauges up to 750 microns)

Grade	Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
8010	clear, polished	125 - 750	5 - 30	915 / 1220 (1524)	36 / 48 (60)
8020	coloured, polished	250 - 750	10 - 30	915 / 1220	36 / 48
8040	clear, FDA approved, polished	175 - 750	7 - 30	915 / 1220 (1524)	36 / 48 (60)

### Lexan 8010 Film

- True color reproduction
- Excellent depth effect in multi-layer printing
- UV/non-UV stabilized



### Lexan 8040 Film

- FDA approved
- True color reproduction
- Excellent depth effect
- High heat resistance
- Excellent dimensional stability
- UV/Non-UV stabilized



## Polished Optical Grades

Grade	Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
OQ	optically clear polished	175 & 650	7 & 25	1220 / 1270	48 / 50
T2FOQ	optically clear / low stress	175 - 500	7 - 20	1220 / 1270	48 / 50

## Graphic Sheet (Gauges above 750 microns)

Grade	Surface	Gauges (microns)	Gauges (mills)	max sheets sizes (mm)	max sheets sizes (inch)
80330	clear, polished	750 - 2000	30 - 80	1250 x 2050	50 x 80
80550	clear, polished*	750 - 2000	30 - 80	1250 x 2050	50 x 80
80650	clear, polished*	750 - 2000	30 - 80	1250 x 2050	50 x 80

\* Specifically developed for UV curing ink systems.

### Lexan 80330 Film

- High heat resistance
- Excellent dimensional stability
- Excellent impact performance
- Superior optical properties for back-printed, see-through applications
- High precision die-cutting with burr-free edges



### Lexan 80550/80650 Film

- High heat resistance
- Excellent dimensional stability
- Excellent impact performance
- Tailor-made for UV curing ink systems
- Substrate color consistency
- Superior brightness (towards blue)
- Optimum ink adhesion, even at low energy curing levels
- High precision die-cutting with burr-free edges



# TEXTURED GRADES

The range of Lexan® textured films offers broad design flexibility and aesthetic appeal. Many grades are available in custom colors, subject to a minimum order quantity. Products can be designed with square corners, straight sides, narrow-width lines and flat plateaus. Consistent high performance in embossed applications is possible thanks to the films' outstanding dimensional stability and ductility.

Lexan textured films are typically used for membrane switch overlays, automotive dials, audio/video remote control fascias, labels for industrial equipment, control panels for HV/AC equipment and digital media applications.

**Polished:** Excellent printing surface with true ink color fidelity and optics. Particularly effective for LED/LCD windows. Provides primary substrate finish for screener-applied selective textures.

**Fine matt:** Good printing surface. Offers increased scratch resistance compared to polished. Wet-Out-Window capable for automotive display applications.

**Matt:** Light diffuser. Hides filaments and eliminates 'hot spots' in back-lit applications. The preferred finish for 'dead front' graphics. Offers reduced surface reflection and gloss.

**Velvet:** Hides scratches, fingerprints and marring for heavy-use applications. Also acts as a diffuser for "windowed" or back-lit applications.

**Suede:** Excellent in very heavy-wear applications. Resists abrasion while maintaining its attractive appearance.

## Textured Grades (Gauges up to 750 microns)

### Textured one side

Grade	Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
8A13	matt / polished	125 - 635	5 - 25	915 / 1220	36 / 48
8A13F	fine matt / polished	250 - 500	10 - 20	915 / 1220	36 / 48
8A35	velvet / polished	125 - 750	5 - 30	915 / 1220	36 / 48
8A37	brushed / polished	250 - 500	10 - 20	915 / 1220	36 / 48
8A73	matt / polished	250 - 500	10- 20	915 / 1220	36 / 48
T2F	matt / polished	175 - 635	7 - 25	1220 / 1524	48 / 60

### Textured both sides

Grade	Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
8B35	velvet / matt	75 - 500	3 - 20	915 / 1220 / 1524	36 / 48 / 60
8B35E	velvet / matt	125 - 500	5 - 20	915 / 1220	36 / 48
8B35F	velvet / fine matt	175 - 750	7 - 30	915 / 1220	36 / 48
8B36	suede / matt	250 - 500	10 - 20	915 / 1220	36 / 48
8B38	velvet / fine matt	175 - 1000**	17 - 40	915 / 1220	36 / 48
DM35	velvet / matt	125 - 375	5 - 15	915 / 1524	36 / 61
GS135	velvet / matt	250 - 500	10 - 20	1220	46

\*\* 1000 only available sheeted 2050 x 1250 mm

### Lexan 8A13/8A13F Film

- High thermal stability permits close proximity to illumination sources/heat emitting components
- Dimensional stability allows close tolerance printing registration after repeated heating and drying cycles



### Lexan 8A35 Film

- High temperature resistance
- Excellent dimensional stability
- Mar resistance



### Lexan 8A73 Film

- Superior light diffusion properties
- Superior clean edge die-cut ability



### Lexan 8B35 Film

- Excellent printability without pre-treatment



### Lexan GS135 Film

- Transparent PVF/PC laminated film
- Superior chemical resistance
- Long-term weatherability
- Improved abrasion resistance
- Rated UL94 VTM0



### Lexan TRUE-2-FORM\* (T2F\*) Film

- Excellent formability facilitates large-scale production using IMD
- Tight graphics registration
- Capability to mold large, deep parts



### Lexan DM Film Series

- Scratch-resistant first surface
- Custom widths and lengths for digital media
- Reverse wound available




### Lexan 8B38 Film

- Low gloss
- Wide range of surface finishes



## FLAME RETARDANT GRADES

Lexan flame retardant films offer screen printers the same printability and ink adhesion as other Lexan graphic films, combined with superior flame retardancy, (meeting UL94-V0 and VTM0 standards), excellent dielectric strength, low moisture absorption and high dimensional stability. These films are available in a choice of textured finishes.

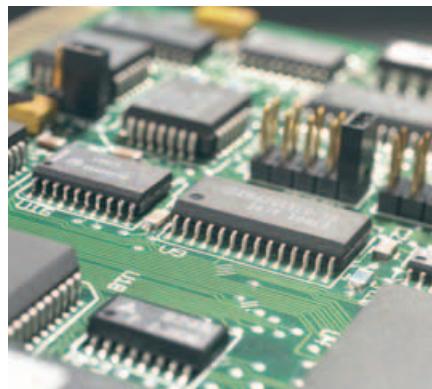

### Flame Retardant Grades

Grade	Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
FR60	polished / polished	250 - 750	10 - 30	915 / 1220 (1524)	36 / 48 / 60
FR63	matt, polished	250 - 635	10 - 25	915 / 1220	36 / 48
FR65	velvet / matt	250 - 500	10 - 20	915 / 1220 (1524)	36 / 48 / 60
FR66	suede / matt	250 - 500	10 - 20	915 / 1220	36 / 48
FR83	matt, polished	50 - 175	2 - 7	915	36

# HIGH PERFORMANCE GRADES

Lexan® high performance films offer exceptional resistance to attack by chemicals and to abrasion, making them good candidates for a wide range of applications. These include flat membrane switch overlays for microwave ovens, lenses for cell phones and

other handheld devices, anti-reflective computer screens and display windows for audio/video equipment, labels for washing machines and anti-fog lenses for goggles, eyewear and gauges.

## Chemical and Abrasion Resistant Grades

Grade	Coated Surface	Uncoated Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
HP92 S or H	polished (92% gloss)	polished	175 - 750	7 - 30	1220	48
HP60 S or H	very fine matt (60% gloss)	polished	175 - 750	7 - 30	1220	48
HP40 S or H	fine matt (40% gloss)	polished	175 - 750	7 - 30	1220	48
HP12 S or H	matt (12% gloss)	polished	175 - 750	7 - 30	1220	48

## Chemical, Abrasion and UV Resistant Grades

Grade	Coated Surface	Uncoated Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
HP92 W	polished (92% gloss)	polished	175 - 635	7 - 25	1220	48
HP12 W	matt (12% gloss)	polished	175 - 635	7 - 25	1220	48
HP92 WP	polished (92% gloss)	polished	175 - 635	7 - 25	1220	48

## Anti-Fog Grades

Grade	Coated Surface	Uncoated Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
HPFAF	anti-fog	polished	175 - 750	7 - 30	1220	48

## Abrasion Resistant Anti-Fog Grades

Grade	1 <sup>st</sup> Coated Surface	2 <sup>nd</sup> Coated Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
HP92AF	abrasion resistant (92% gloss)	anti-fog coating	500 - 750	20 - 30	1220	48

## Optical Performance

Grade	Coated Surface	Uncoated Surface	Gauges (microns)	Gauges (mills)	Roll widths (mm)	Roll widths (inch)
OQ92S	92% gloss optical grade	polished optical grade	175 - 750	7 - 30	1220	48



### Lexan HP92S Film

- First surface printable
- Excellent abrasion resistance
- Chemical resistance



### Lexan HP92H

- Excellent chemical and abrasion resistance
- Extreme durability




### Lexan HP92W Film

- High UV, chemical and abrasion resistance
- Extreme durability



### Lexan HPFAF Film

- One-side hard-coated
- Permanent anti-fog properties
- Scratch and abrasion resistance
- Antistatic properties
- Clear/custom colors available

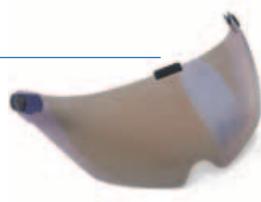

### Lexan HP92AF Film

- Two-side hard-coated
- 2<sup>nd</sup> surface:
  - Permanent anti-fog properties
- Scratch and abrasion resistance
- Antistatic properties
- Clear film



### Lexan HP92WP Film

- High UV, chemical and abrasion resistance
- Hard-coated surface
- Printable



## GE Advanced Materials Technical Support

GE Advanced Materials' Specialty Film & Sheet business is a leading supplier of high-performance engineering film and sheet products, serving customers around the world in a broad spectrum of industries and applications.

Recognized as a center of excellence, the Polymer Processing Development Center in the USA is equipped with state-of-the-art laboratories and facilities for printing, thermoforming, injection molding and prototype testing. Engineers, designers and technologists explore and extend the boundaries of film application development through sophisticated material analysis and advanced processing technology. This includes vacuum and pressure forming, silk screening, IMD and embossing.

With satellite development centers in the Netherlands, Japan, China and India, GE Advanced Materials Specialty Film and Sheet offers customers around the world access to this full range of laboratory, testing and design services, complemented by local hands-on technical support.



**Europe:**

GE Advanced Materials  
Specialty Film & Sheet  
Plasticslaan 1  
PO Box 112  
NL - 4600 AC Bergen op Zoom  
The Netherlands  
Tel. (31) (164) 292742  
Fax. (31) (164) 291986

**Americas:**

GE Advanced Materials  
Specialty Film & Sheet  
One Plastics Avenue  
Pittsfield, MA 01201  
USA  
Tel. (1) (413) 448 7110  
Fax. (1) (413) 448 7506  
Toll free: 800 451 3147

**Pacific:**

GE Advanced Materials  
Specialty Film & Sheet  
1266 Nanjin Road (W)  
16th Floor, Plaza 66  
200040 Shanghai  
China  
Tel. (86) 21 6288 1088  
Fax. (86) 21 6288 0818

[geadvancedmaterials.com](http://geadvancedmaterials.com)

© 2004 General Electric Company  
All Rights Reserved

DISCLAIMER: THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE ADVANCED MATERIALS UNIT OF GENERAL ELECTRIC COMPANY, USA, ITS SUBSIDIARIES AND AFFILIATES ("GEAM"), ARE SOLD SUBJECT TO GEAM'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEAM MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEAM MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEAM'S STANDARD CONDITIONS OF SALE, GEAM AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of GEAM's materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating GEAM materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEAM's Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEAM. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right.

\* TRUE-2-FORM, T2F and Lexan are trademarks of General Electric Company.



GE imagination at work

SFS-689